



Justrite Safety Group

Dry Areas - Heavy Duty Modular Rubber Mats

# 045 Slabmat™

Dry Areas - Heavy duty

# 045 Slabmat™

The Slabmat™ is durable protective mat which protects both floors and heavy equipment from damage. The thick platform can withstand heavy weights while the non-slip textured top surface ensures sure footing and freedom of movement. Made of a tough rubber compound that makes the mat virtually indestructible.

Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals. An indestructible rubber mat that absorbs shock of fallen materials and protects floors and equipment. Loose lay mat with no installation required.

#### Recommended use:

- Heavy duty
- Industrial Environments
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.

#### Specifications:

- Tough rubber compound
- No borders
- Overall thickness: 12,7 mm
- Weight: 18 kg/m<sup>2</sup>
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals

#### Standard sizes:

- 122cm x 182cm

#### Colours:

- Black

#### Cleaning instructions:

- Hose off with water




#### PRODUCT TESTING



## 045 Slabmat™ (black)

Art. nr.	Dimensions	Weight kg
045S1246BL	122cm x 182cm	35,6

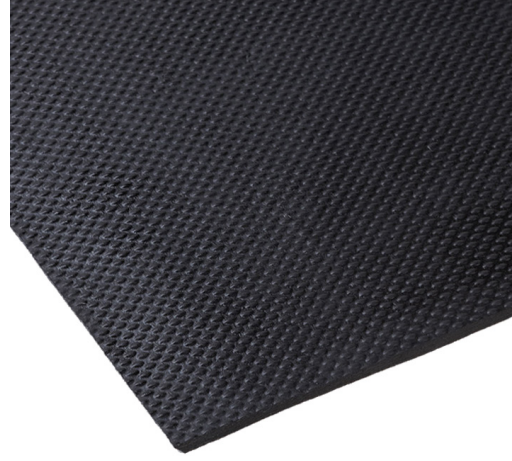

# 045 Slabmat™

## GENERAL DESCRIPTION

Description	Textured top surface which provides traction.
Recommended use	Dry Areas
Surface	Textured grip pattern
Category	Ergonomic, Anti-fatigue Safety Matting Heavy duty
Colours	Black
Edges	No borders

## TECHNICAL SPECIFICATIONS

Material	Tough rubber compound
Process	Compression Moulding
Total weight	18 kg/m <sup>2</sup>
Overall thickness	12,7 mm

## TESTS

Sustainability	Recyclable material	
Elongation	ASTM D412	80%
Tear Strength	ASTM D1004	117 lb/in
Hardness	ASTM D2240-02	64 Shore A
Surface flammability	ASTM D2859	Pass

## DIMENSIONS

Standard sizes	Full rolls	Custom lengths
122cm x 182cm		