




Justrite Safety Group

Indoor - Medium traffic

136 Polynib®

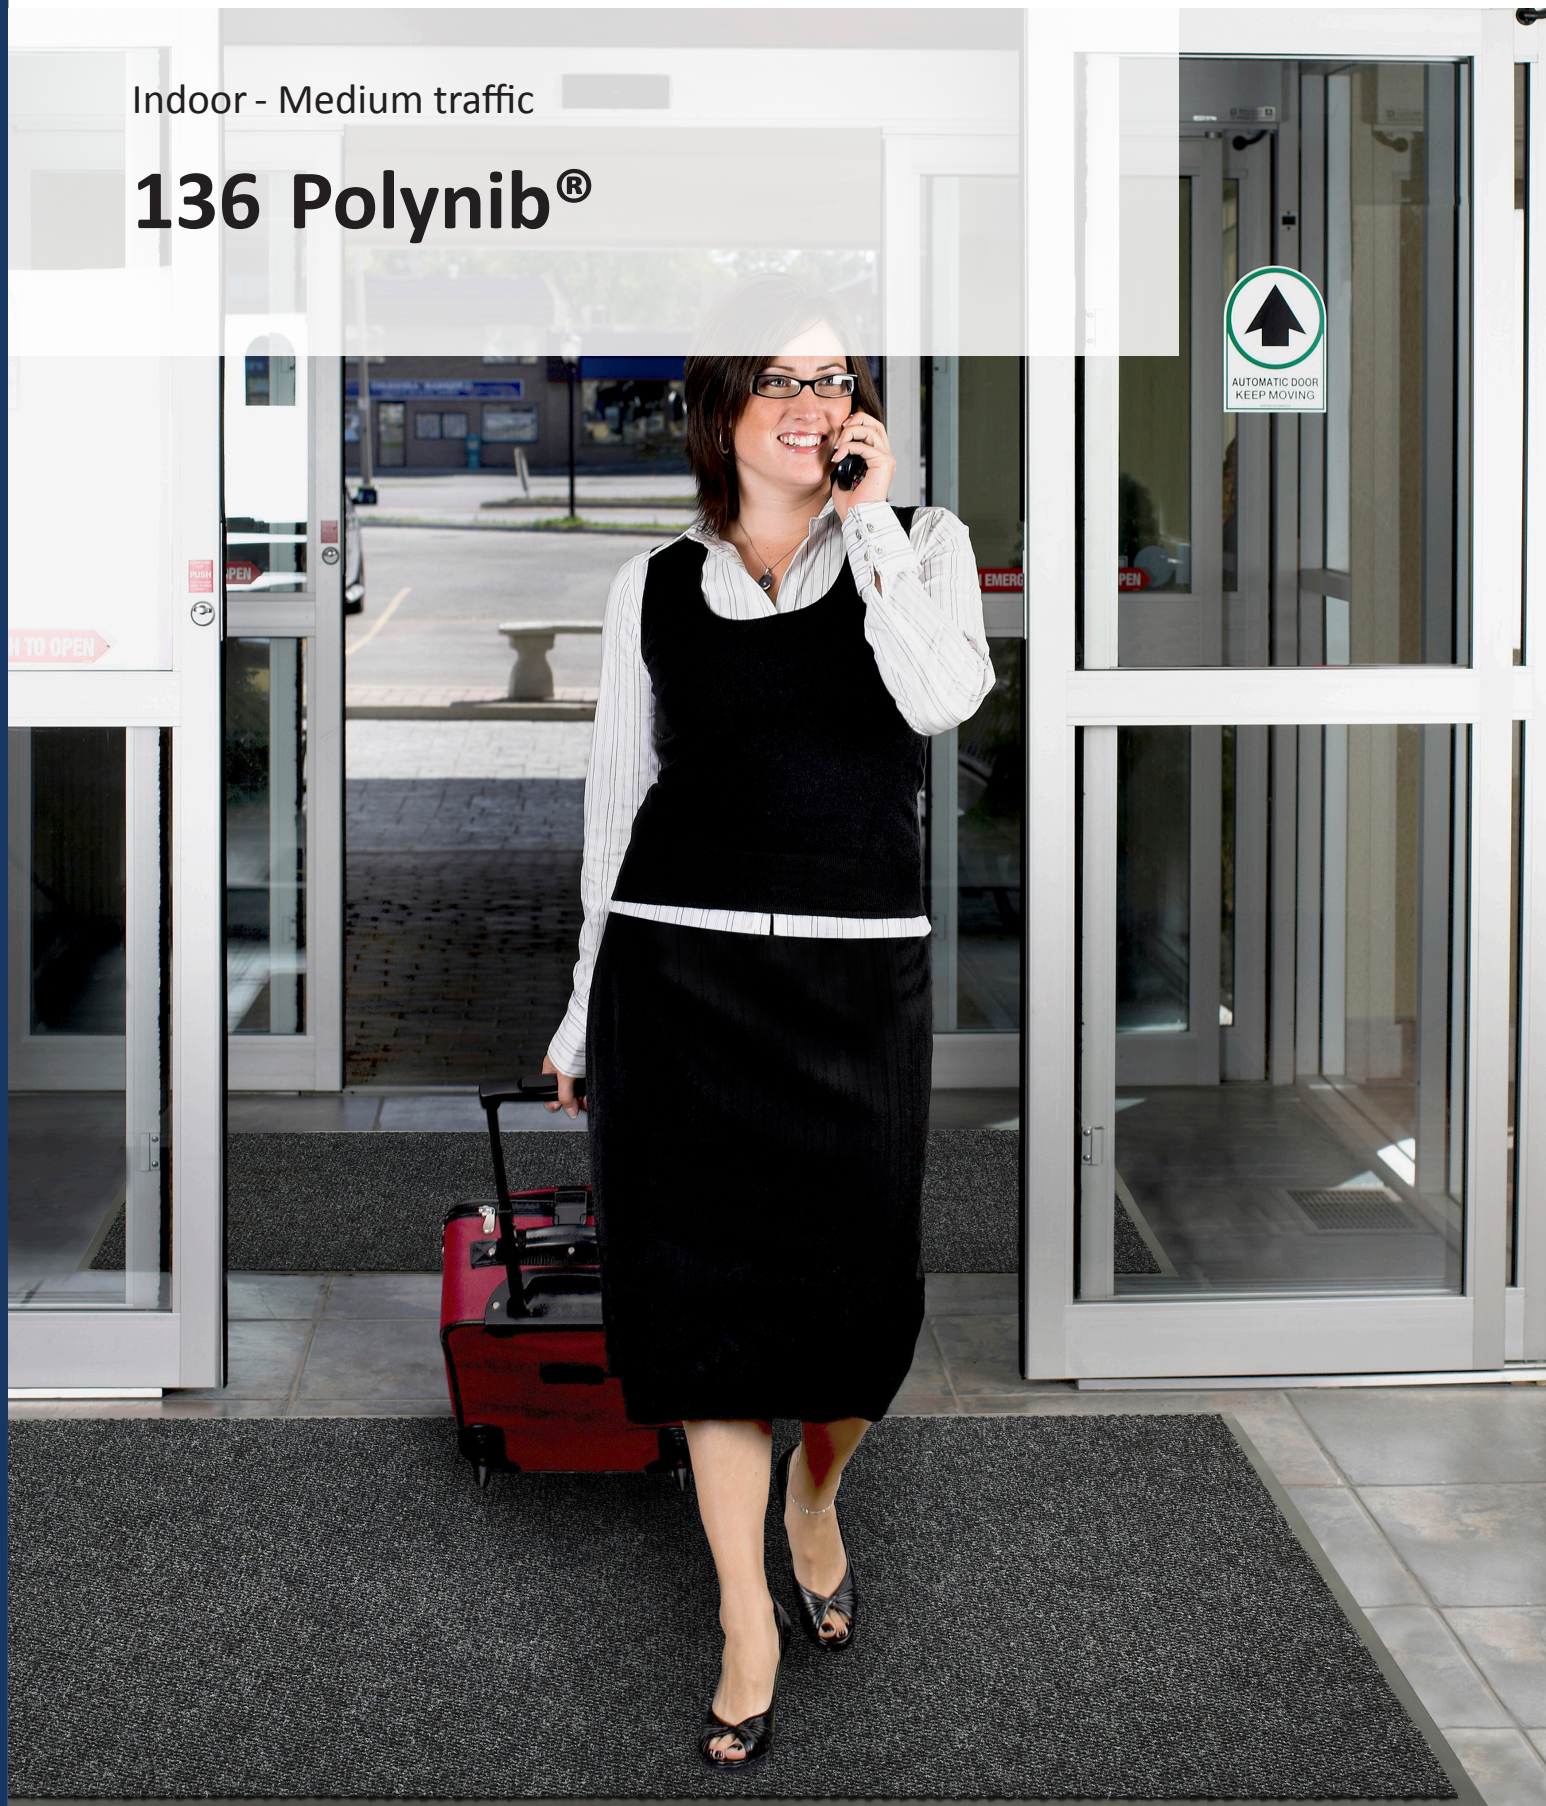

Indoor - Medium traffic

136 Polynib®

This is an economical yet highly effective entrance mat product. Durable fibres offer good scraping action, preventing moisture and grime from being walked into facilities.

Low profile allows foot, cart and wheelchair traffic to move easily over the mat. Vinyl backing is moisture resistant and slip resistant.

Recommended use:

- Medium traffic
- For placement inside entrances of schools, offices, shops

Specifications:

- 100% anti-static polypropylene fibres
- Backing: Black vinyl (DOP free)
- Vinyl borders: 2.5 cm on all sides
- Overall thickness: 7,5 mm
- Weight: 3,1 kg/m²

Standard sizes:

- 60cm x 90cm
- 90cm x 150cm
- 120cm x 180cm
- 122cm x 244cm

Full rolls:

- 120cm x 20m
- 200cm x 20m

Custom lengths:

- 120cm x linm
- 200cm x linm

Colours:


- Brown, Charcoal, Blue, Green

Cleaning instructions:

- Vacuum clean




PRODUCT TESTING







Charcoal (CH)



Blue (BU)



Brown (BR)



Green (GN)

136 Polynib®

Art. nr.	Dimensions	Weight kg
136S0023..	60cm x 90cm	1,7
136S0035..	90cm x 150cm	4,2
136S0046..	120cm x 180cm	6,7
136R0048..	120cm x 20m	88
136R0072..	200cm x 20m	136
136C0048..	120cm x linm	4,4
136C0072..	200cm x linm	6,77

Colours: Charcoal (CH), Blue (BU), Brown (BR), Green (GN)

GENERAL DESCRIPTION

Type	Indoor Absorbant - Loose Lay Carpet Mats
Description	Absorbent carpet mat
Recommended use	Indoor
Surface	Nibbed
Category	Dust Control Matting Medium traffic
Colours	Brown, Charcoal, Blue, Green
Edges	Vinyl borders: 2.5 cm on all sides

TECHNICAL SPECIFICATIONS

Material	100% anti-static polypropylene fibres
Backing	Black vinyl (DOP free)
Process	Needle punch
Pile weight	650 g/m ²
Total weight	3,1 kg/m ²
Overall thickness	7,5 mm

TESTS

Absorption capacity	TNO W6034	2.43 l/m ²
Comfort class	EN 1307	LC3
Sustainability	Recyclable material, Contributes to a cleaner environment by reducing need of cleaning chemicals	
Surface flammability	ASTM D2859	Pass

DIMENSIONS

Standard sizes	Full rolls	Custom lengths
60cm x 90cm	120cm x 20m	120cm x linm
90cm x 150cm	200cm x 20m	200cm x linm
120cm x 180cm		
122cm x 244cm		