

Captain's Treble Seat




Assembly Guide



Parts and Fittings


Back Rest

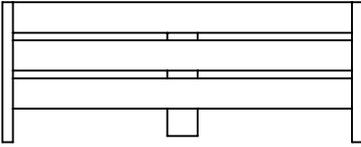

x1


Two People required
for safe assembly

Seat

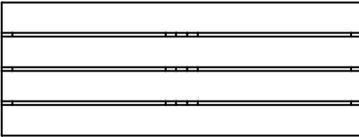


x1

Outside Leg




x2

Middle Legs



x2

Fittings



x8

M10x60



x6




x6

Tools Required



x1




x1

Power Screwdriver

6mm Allen Key




Step 1 Use M10x60 bolts to secure Outside Legs to Seat.

 x4  x4

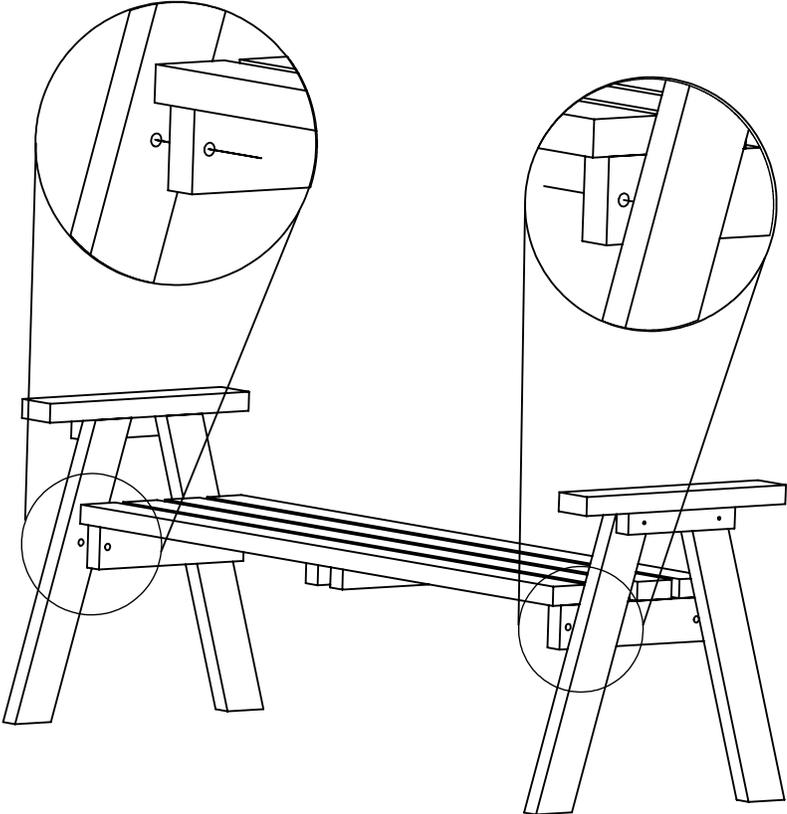


Step 2

Screw Middle Legs to the seat, 2 screws per leg.

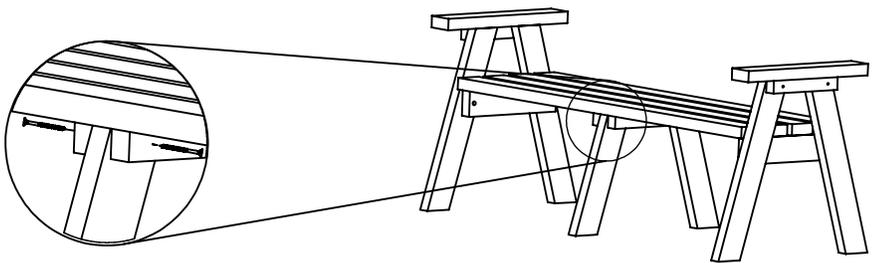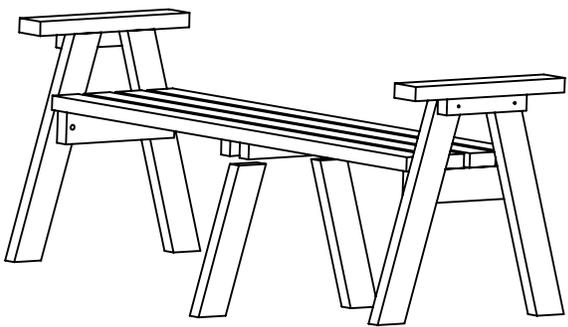


Step 3 Place Back Rest Between legs and use remaining fixings to secure see below.

Rear View

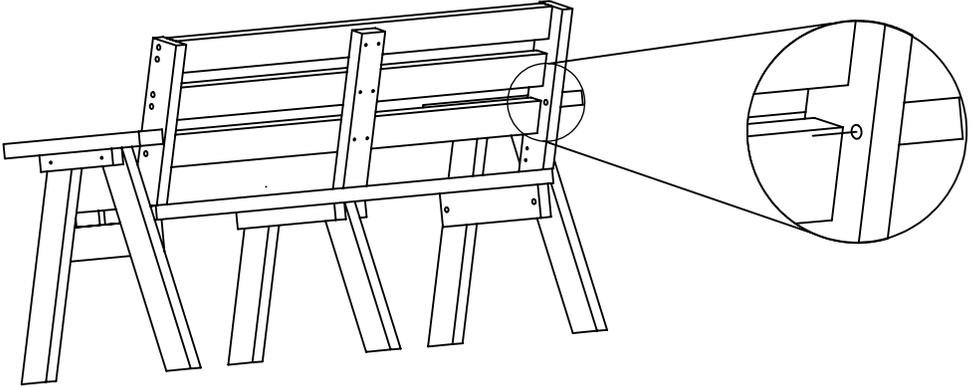

Note: Always bolt first this will help align back rest with seat.

Front View

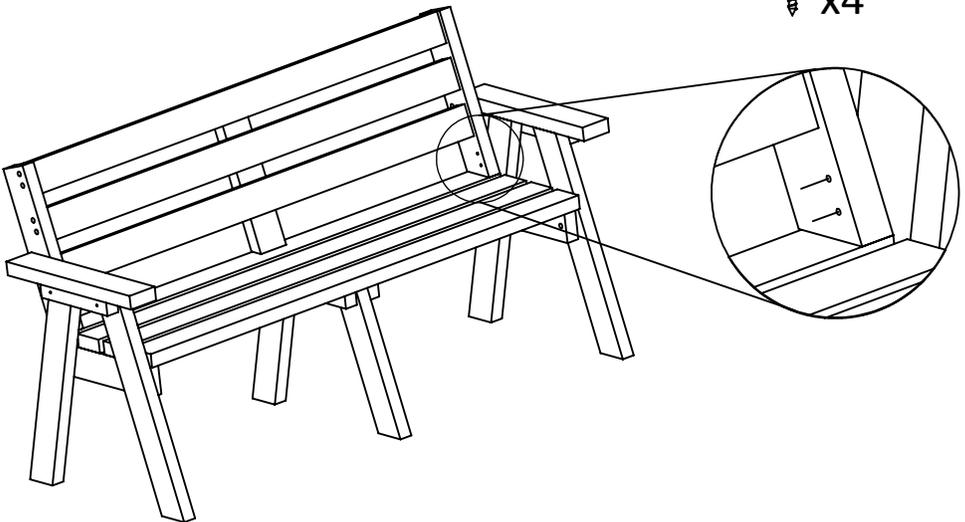

Notes:

Notes:

THANK YOU FOR PURCHASING THIS PRODUCT

CONTACT DETAILS:

Email: sales@vprecycledplastic.co.uk

Web: www.vprecycledplastic.co.uk

Tel: 0808 1699 838

Value Products Ltd Unit B, Sharp Road, Poole, BH12 4BG

All Parts and Fixings checked by:	
Print Name:	Signature