






Oakfield Bench



Oakfield Bench with back





Parts List

| | No. | Drawing |
|--------------|-----|---|
| Benchfeet | 2 |  |
| Seatelement | 1 |  |
| Back element | |  |
| Screw | 14 |  |
| Bit | 1 |  |



Oakfield Bench without back

Parts List

| | No. | Drawing |
|-------------|-----|---|
| Benchfeet | 2 |  |
| Seatelement | 1 |  |
| Screw | 14 |  |
| Bit | 1 |  |


Necessary Tools (both types)

- Tape or folding rule
- Spiral drill Ø = 6 mm and drilling machine
- Bar clamps, scissors

Oakfield Bench


Oakfield Bench with back

Step 1

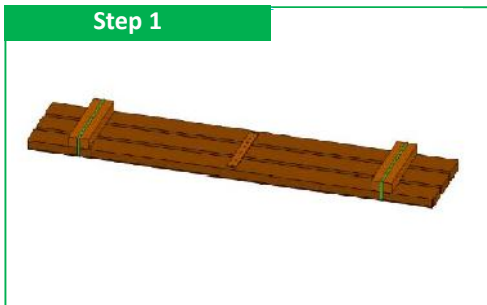


Fix the seat element with the upper side down on a clean and solid work place.

Step 2

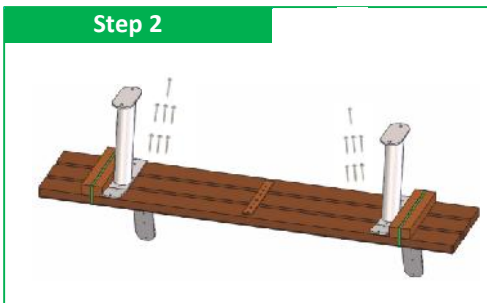

Adjust the bench foot centered at the installation support and drill through the given holes of the foot with a 6mm spiral drill (7 holes per foot). Fix the foot (7 screws per foot) to the seat element.

Step 3

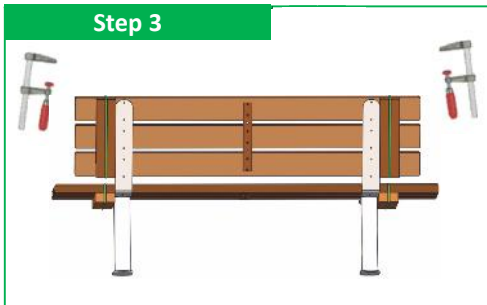

Place the bench with the feet on the floor (attention: may tip over) and install the back element according step 2 (6 screws per side). Secure the element during assembly with bar clamps.


Step 4



After assembly the installation support can be removed. Therefore carefully cut the green tape (tension!). Take care to find a safe and stable place for the bench.


Oakfield Bench without back

Step 1

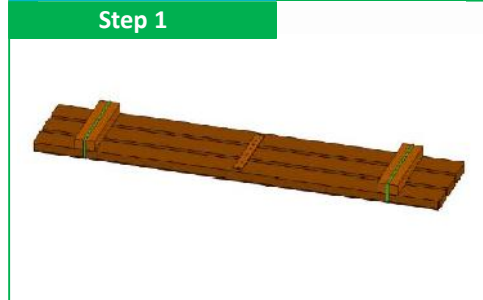

Fix the seat element with the upper side down on a clean and solid work place.

Step 2

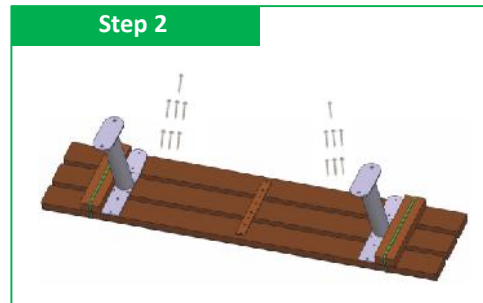

Adjust the bench foot centered at the installation support and drill through the given holes of the foot with a 6mm spiral drill (7 holes per foot). Fix the foot (7 screws per foot) to the seat element.

Step 3



After assembly the installation support can be removed. Therefore carefully cut the green tape (tension!). Take care to find a safe and stable place for the bench.

