Assembly Instructions






Email: Sales@nobutts.co.uk
Web: www.nobutts.co.uk

Tel: 0800 1777 052

Shelter type: Peveril 4m

CVCS1ZC-01-27022017-UK

Exploded View

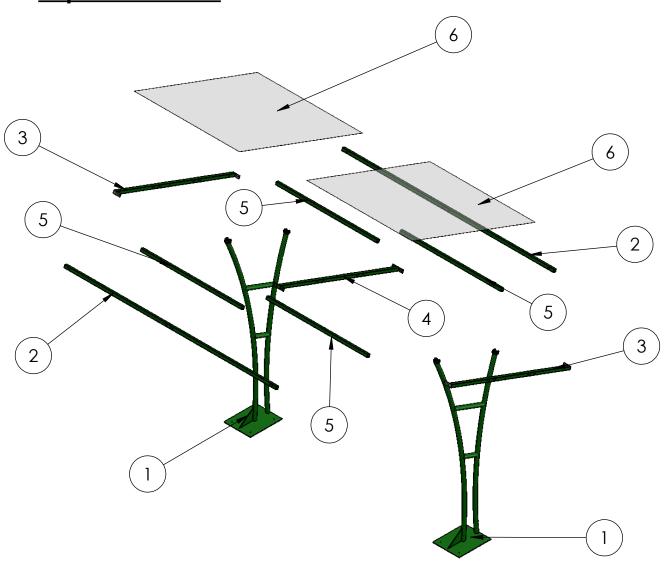

Tools required: (Not supplied)



Drill/Screwdriver



Socket set


PARTS LIST & FITTINGS

ITEM NO.	Part No.	PART NAME	Part No	Default/QTY.
1	PL1	Peveril Side Frame		2
2	FRB	3950 BEAM - for 4m peveril only		2
3	EFB	2375 L BAR	<u> </u>	2
4	CFB2	2375 T BAR		1
5	CFB1	1900 T BAR		4
6	RP	ROOF PANEL		2

Fittings	M10 x 100 Anchor Bolt	M10 x 80 Hex head bolt	M10 Nuts	M10 Standard Washers	M12 Standard Washers	25mm Tech screws
QTY.	8	44	44	88	8	119
lmage						


Black plastic caps will be supplied with shelter to cover bolt ends.

Step 1 Attach Both **EFB End Bars** to **PL1 Peveril Legs**.

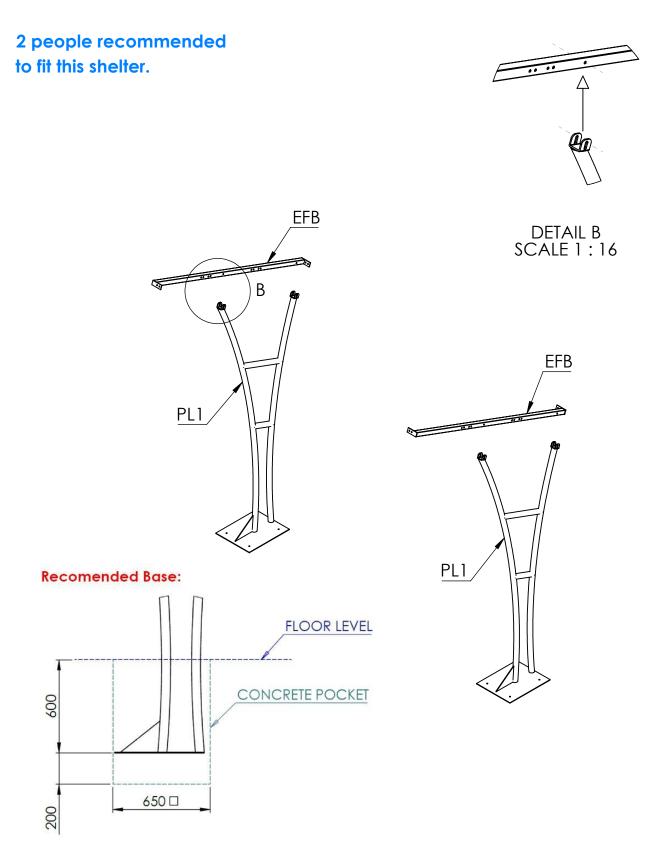


Note: Move legs to desired location (shelter must be sub surfaced 800mm minimum). Fix the central post in place and build the rest of the shelter from this point.


Step 2 Loosely fasten **FRB Front/Rear Bar** to **PL1Peveril legs,** this gives you the outside post positions.

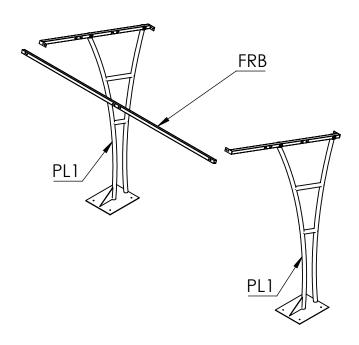


Step 3 Do the same for the rear of the shelter and secure the foot plates in position.

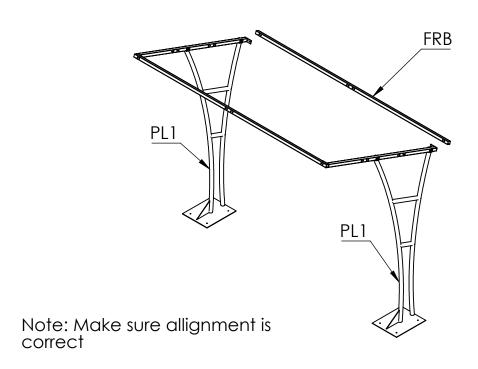

Step 4 Bolt the CFB2 Central Frame Bar 2 to FRB Side Frame Bars.

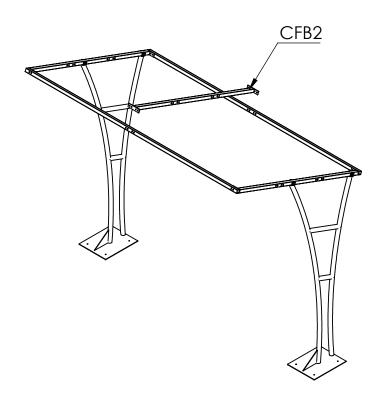


Step 5 Secure all CFB1 Central Frame Bars to the CFB2 Central Frame Bars 2 & EFB End Frame Bars

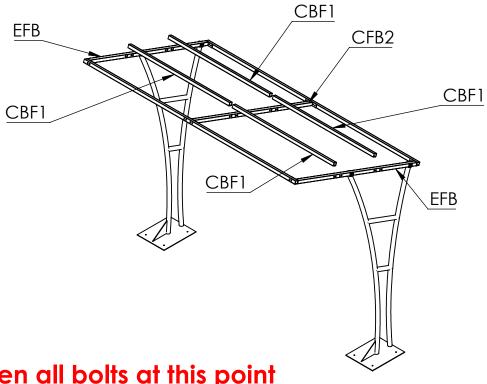

Tighten all bolts at this point and make sure shelter is secure.

Step 6 Finally screw the **RP Roof Pane**l to the top of the frame spacing each section evenly between front, rear, left and right.

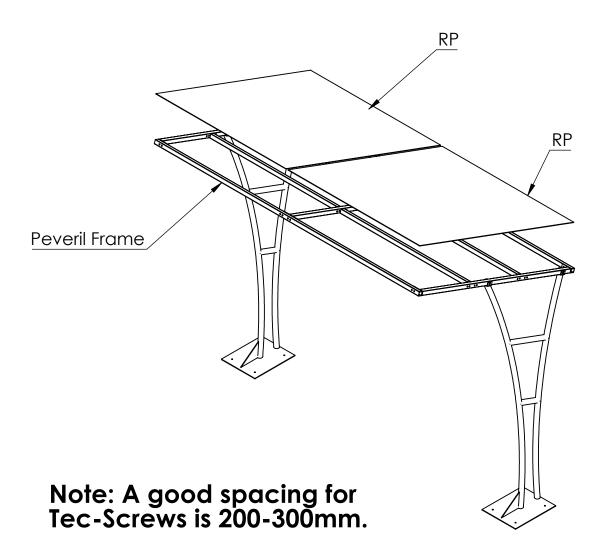

THANK YOU FOR PURCHASING THIS PRODUCT

MAINTENANCE:

To ensure your products give you many years of use we recommend that you:

- Clean panels regularly with soapy water
- Ensure all fittings are tight (for example after a big storm)
- Touch up any exposed metal should it get scratched

CONTACT DETAILS:

Email: Sales@nobutts.co.uk

Web: www.nobutts.co.uk

Tel: 0800 1777 052

NBB, Unit 5, 145 Sterte Road, Poole, Dorset BH15 2AF

All Parts and Fixings checked by:				
Print Name:	Signature:			