

SAM® Pelvic Sling II

# SLIDE. CLICK. SECURE.

# OPTIMAL FORCE STABILIZATION

SAM® Pelvic Sling is the first and only force-controlled circumferential pelvic belt. Featuring an optimized one-piece design, it's scientifically proven to safely and effectively reduce and stabilize open-book pelvic ring fractures.









# FEATURED TECHNOLOGY

#### **AUTOSTOP BUCKLE**

The patented SAM® AUTOSTOP buckle acts to avoid over- or undertightening of SAM® Pelvic Sling. Once optimal compressive force is reached, two prongs activate, clicking to confirm correct application. The sling is secured in place with its hook and loop system strap.





# **SAM**<sup>®</sup> Pelvic Sling II

## **ENGINEERED TO PRESERVE LIFE**

LOW-FRICTION POSTERIOR SLIDER

Easier transfers following severe trauma made possible by lowfriction materials covering backside of the pelvic sling.

2 SAM® AUTOSTOP BUCKLE

Tactile and audible "click" provides clear feedback, confirming proper application and preventing over-tightening while maintaining optimal force.

3 PRECISION STRAP

Precisely-engineered holes lock with AUTOSTOP Buckle, allowing for quick application. Secure fastening with sturdy hook and loop strap.

4 TAPERED DESIGN


Narrow and tapered front facilitates urinary catheterization, interventional radiology, external fixation, and abdominal surgery

5 RADIOLUCENT MATERIAL

All materials are radiolucent except the buckle's two stainless steel springs, allowing X-rays and CT-scans without removal.

6 3 SIZES AVAILABLE

The Standard size fits 95% of the population. Complete the set with the Small and Large sizes to fit almost any body type.

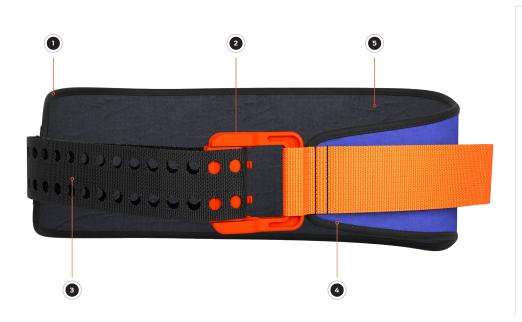

# MODFIS ORANGE/BLUE

OD GREEN /BLACK

**GLOBAL SALES** 

sammedical.com

U.S. Toll Free: 800.818.4726

U.S. Local: 503.639.5474

# PRODUCT SPECIFICATIONS

### PACKAGED SIZE & WEIGHT

Height: 5.5 in (14 cm) Width: 7.5 in (19 cm) Depth: 3.75 in (9.5 cm) Weight: 8.6 - 9.2 oz (244 - 250g)\*\*

EC REP

#### **OPERATING PRINCIPLE**

Optimal force is reached when 150N of circumferential pressure is attained, which extends prongs from SAM® AUTOSTOP Buckle through the Precision Strap.

#### X-RAY RADIOLUCENT



Emergo Europe, Prinsessegracht 20, 2514 AP, The Hague, The Netherlands SAM Medical Products 12200 SW Tualatin Rd., Ste 200 Tualatin, OR 97062 USA

#### **MODELS AVAILABLE**

Civilian

Small 27-45"/69-114 cm (PS300-OB-EN) Standard 32-50" / 81-127 cm (PS301-OB-EN) U.S. Fax: 503.639.5425 Large 36-54"/91-137 cm (PS302-OB-EN)

Military

Standard 32-50"/81-127 cm (PS301-OD-EN)

#### $^{\star}$ Size and weight vary by configuration and manufacturing process.

\*\*Weight varies by size (Small, Standard, Large)
SAM® is a registered trademark in the United States and other countries. ©2019 SAM Medical Products. All rights reserved.